4-5 Intelligent Communication Controllers

I-752N Series

Programmable Intelligent Communication Controller



Features >>>>

- Built-in "Addressable RS-485 to RS-232 Converter" firmware Programmable Intelligent Communication Controller
- Supports about 30 well-defined commands
- Supports power-up and safe value for DO
- R.O.C. Invention Patent No. 086674, No.103060 and No.
- Supports Dual-Watchdog commands
- Watchdog timer provides fault tolerance and recovery
- Low power consumption
- Made from fire-retardant materials (UL94-V0 Level)

Introduction

There are many RS-232 devices in industry applications. Nowadays it becomes important to link all those RS-232 devices together for automation and information. Usually those RS-232 devices are far away from the host-PC and widely distributed in the factory. So it is not a good idea to use multi-serial cards to connect all these RS-232 devices together. The I-752N series product can be used to link multiple RS-232 devices by a single RS-485 network. The RS-485 is famous for its easy maintenance, simple cabling, stable, reliable and low cost.

Onboard 1 KB Oueue buffer

The I-752N series module is equipped with a 1 KB queue buffer for its local RS-232 device. All input data can be stored in the queue buffer until the Host PC has time to read it. This feature allows the Host PC to link thousands of RS-232 devices without any loss of data.

3000V isolation on RS-485 side

COM2 of the I-752N modules is an isolated RS-485 port with 3000 Vpc isolation, which protects the local RS-232 devices from transient noises coming from the RS-485 network.

Self-Tuner ASIC inside

The built-in Self-Tuner ASIC on an RS-485 port can auto detect and control the send/receive direction of the RS-485 network. Thus, there is no need for application programs to be concerned about direction control of the RS-485 network.

Can be used as Addressable RS-485 to RS-232 Converter


Most RS-232 devices don't support device addressing. The ICP DAS I-752N module assigns a unique address for each RS-232 device installed. When Host PC sends a command with a device address to the RS-485 network, the destination I-752N module will remove the address field, and then pass the other commands to the specified local RS-232 devices. The response from the local RS-232 devices will be returned to the Host PC via the I-752N.

Master-type Addressable RS-485 to RS-232 Converter

The ICP DAS I-752N product is unique that they are Master type converters which use our R.O.C. Patent 086674, while most other converters are Slave-type, which are helpless without a Host PC. In real industrial applications, many users are not satisfied with Slavetype converters as they cannot be adapted to individual requirement. The powerful I-752N series analyzes the local RS-232 devices, DI and DO without the need for a Host PC. Refer to Applications 5 \sim 9 for more information in the manual.

Can be used as RS-232 to RS-485 Device Server

The Device Server is an appliance that networking any device with a serial communication port. The I-752N series Intelligent Communication Controller allows the RS-232 serial devices to connect to the RS-485 network. Also, there are PDS series products available from ICP DAS, which provide Ethernet connectivity for serial devices.

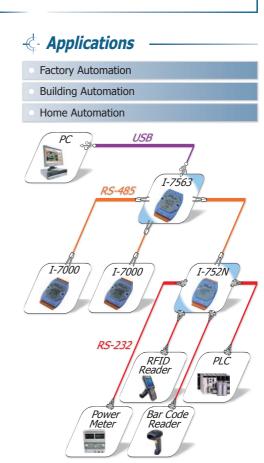

- I/O Specifications

Models	I-7521(D)	I-7522(D)	I-7523(D)	I-7522A(D)	I-7524(D)	I-7527(D)		
User-Defined I/O								
I/O Channel	3	-	-	_	-	_		
Digital Output								
DI Channel	2	2	1	5	1	1		
Input Type	Source (Dry Type), (Source (Dry Type), Common Ground, non-isolated						
Off Voltage	+1 V max.	+1 V max.						
On Voltage	+3.5 Vpc ~ +30 Vpc	+3.5 Vpc ~ +30 Vpc						
Digital Output								
DO Channel	3	1	_	5	1	1		
Output Type	Open Collector (Sink	Open Collector (Sink/NPN), non-isolated						
Load Voltage	+30 VDC max.	+30 Vbc max.						
Load Current	100 mA max.							

System Specifications

Models	I-7521(D)	I-7522(D)	I-7523(D)	I-7522A(D)	I-7524(D)	I-7527(D)			
System									
CPU	80188, 20 MHz								
SRAM	128 KB								
Flash	512 KB								
EEPROM	2 KB								
Real-Time Clock	_								
Watchdog Timer	Yes								
Operating System	MiniOS7								
Communication Interface	11111037								
COM1	5-wire RS-232 or	2-wire DS-485							
COM2	Isolated 2-wire R			2-wire RS-485					
COM3	_ Isolated 2-wile K.	5-wire RS-232	5-wire RS-232	4-wire RS-422	5-wire RS-232	3-wire RS-232			
	_	5-WITE R5-232		4-WITE R3-422					
COM4	-	-	3-wire RS-232	_	5-wire RS-232	3-wire RS-232			
COM5	_	_	_	-	5-wire RS-232	3-wire RS-232			
COM6	_	-	_	_	-	3-wire RS-232			
COM7	_	-	_	-	-	3-wire RS-232			
COM8	-	-	-	_	_	3-wire RS-232			
Baud Rate		300 ~ 115200 bps							
Data Bit	COM1 ~ COM2: 7								
		COM3 ~ COM8: 5, 6, 7 or 8							
Parity	COM1 ~ COM2: N								
- unity	COM3 ~ COM8: N	Ione, Even, Odd, Ma	rk , Space						
Stop Bit	COM1 ~ COM2: 1	COM1 ~ COM2: 1 or 2 (data bit must be 7)							
этор ыс	COM3 ~ COM8: 1	or 2							
	Male DB-9 x 1			14-Pin screw terr	minal block x 2				
Connector	13-Pin screw tern	ninal block x 1			(for 16 ~ 22 AWG wires; 3.5 mm pitch)				
	(for 16 ~ 26 AWC	wires; 3.81 mm pito	ch)	(101 10 10 22 AWG WIIES, 3.3 Hilli pitch)					
LED Indicators									
LED Display	5-digit 7-segment	LED display for D ve	ersions						
Power									
Protection	Power input rever	se polarity protection	n						
Power Requirement	Unregulated +10	VDC ~ 30 VDC							
Power Consumption	2 W (without disp	lay), 3 W (with displ	ay)						
Mechanical									
Casing	Plastic								
Flammability	Fire-Retardant Ma	terials (UL94-V0 Lev	rel)						
Dimensions (W x H x D)	72 mm x 118 mm	x 35 mm		72 mm x 120 mm	n x 35 mm				
Installation	DIN-Rail Mountine	q		1					
Environment		,							
Operating Temperature	-25 °C ~ +75 °C								
Storage Temperature	-40 °C ~ +80 °C								
Humidity	0 ~ 90% RH, nor	-condensing							
Note:	30 70 141, 1101	. coacrioning							
3-wire RS-232: RxD, TxD, (GND								
5-wire RS-232: RxD, TxD, (
2-wire RS-485: DATA+, DA		inside							
Isolated 2-wire RS-485: DA			Isolation						
4-wire RS-422: RxD+, RxD		, 5555							

Pin Assignments



Terminal No.		Pin Assignment		Pin		er	minal	Pin	
	01	X3		Assignment					Assignment
	02	X2							
	03	X1				1			
	04	DO3				l			
DO	05	DO2		GND	05	ı		09	Data-
	06	DO1		N.C.	04	ı		08	RTS
	07	DI3		RxD	03	ı		07	CTS
DI	08	DI2		TxD	02	ı		06	N.C.
	09	INIT*		Data+	01	ı			IV.C.
COM2	10	(Y)D2+				•			
COMZ	11	(G)D2-							
Power	12	(R)+Vs							
Input 13 (B)GND		COM1: RS-232							
				Male DB-9 Connector					

Termin No.	al	Pin Assignment	Pin	Te	rminal I	No.	Pin
	01	CTS3	Assignment				Assignment
	02	RTS3					
COM3	03	RxD3					
	04	TxD3					
	05	GND	GND	05		09	Data-
DO	06	DO1	N.C.	04		08	RTS
DI	07	DI3	RxD	03		07	CTS
DI	08	DI2	TxD	02		06	N.C.
	09	INIT*	Data+	01	עס		IV.C.
COM2	10	(Y)D2+		_			
COMZ	11	(G)D2-					
Power	12	(R)+Vs					
Input 13 (B)GND			COI	M1 · RS-	.222		
			Ma	COM1: RS-232 Male DB-9 Connector			

Termin No.	al	Pin Assignment	Pin	Te	Terminal No		No.	Pin	
СОМЗ	01 02 03 04	CTS3 RTS3 RxD3 TxD3	Assignment		(1		Assignment
	05	GND	GND	05	K			09	Data-
COM4	06	TxD4	N.C.	04	K	3	4	08	RTS
COM	07	RxD4	RxD	03	K	3	4	07	CTS
DI	08	DI2	TxD	02	K	3	1	06	N.C.
	09	INIT*	Data+	01	K	2	J		11101
COM2	10	(Y)D2+			1		I		
COMZ	11	(G)D2-			K		1		
Power	12	(R)+Vs			,		7		
Input	13	(B)GND		co	M1		· C.	232	
			Ma				_	nnec	tor



Terminal No.	Terminal No.		
DO	01	DO	
DI	02	DI	
	03	D1+	[
	04	D1-	
	05	CTS1	
COM1	06	RTS1	
	07	GND	
	08	TxD1	
	09	RxD1	
	10	INIT*	
COM2	11	(Y)D2+	
COMZ	12	(G)D2-	CC
Power Input	13	(R)+Vs	CC
Power Input	14	(B)GND	

	X507					
nt	Terminal No.		Pin Assignment			
		28	DO3			
		27	DO2			
	DO	26	DO1			
		25	DO0			
		24	DO.PWR			
		23	GND			
		22	DI3			
	DI	21	DI2			
	DI	20	DI1			
		19	DI0			
		18	RxD3-			
	COM3	17	RxD3+			
	COMS	16	TxD3-			
			TxD3+			

Terminal No	Pin Assignment	
DO	01	DO
DI	02	DI
	03	D1+
	04	D1-
	05	CTS1
COM1	06	RTS1
	07	GND
	08	TxD1
	09	RxD1
	10	INIT*
COM2	11	(Y)D2+
COMZ	12	(G)D2-
Power Input	13	(R)+Vs
rower Input	14	(B)GND


X505						
Terminal No.		Pin Assignment				
	28	RxD5				
COM5	27	TxD5				
COMP	26	RTS5				
	25	CTS5				
	24					
	23	RxD4				
COM4	22	TxD4				
COM4	21	RTS4				
	20	CTS4				
	19	GND				
	18	RxD3				
COM3	17	TxD3				
COM	16	RTS3				
	15	CTS3				

Terminal No	Pin Assignment	
DO	01	DO
DI	02	DI
	03	D1+
	04	D1-
	05	CTS1
COM1	06	RTS1
	07	GND
	08	TxD1
	09	RxD1
	10	INIT*
COM2	11	(Y)D2+
COMZ	12	(G)D2-
Power Input	13	(R)+Vs
Power Input	14	(B)GND

X506						
Terminal No.		Pin Assignment				
	28	TxD8				
COM7/9	27	RxD8				
COM7/8	26	TxD7				
	25	RxD7				
	24	GND				
	23	TxD6				
COM5/6	22	RxD6				
COMS/6	21	TxD5				
	20	RxD5				
	19	GND				
	18	TxD4				
COM3/4	17	RxD4				
CO1-13/-4	16	TxD3				
	15	RxD3				





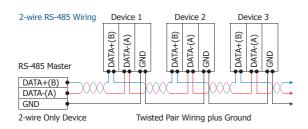


Input Type	DI Value as 0	DI Value as 1			
	Relay ON	Relay Off			
Relay Contact	Relay Close Charles GND	Relay Open Selay Open GND			
	Voltage < 1V	Voltage > 3.5V			
TTL/CMOS Logic	Logic Level Low Logic GND	Logic Level High Logic GND			
	Open Collector On	Open Collector Off			
Open Collector		Off 🛵 X 🗎 🗎 DIX GND			


Output Type	DO Command as 1	DO Command as 0
	Relay ON	Relay Off
Drive Relay	DO.PWR DOX DO.GND	DO.PWR DOX DO.GND
Resistance Load	DO.PWR DOX DO.GND	DO.PWR DOX DO.GND

4-wire RS-422 Wiring

RS-422 Master		RS-422 Device
TxD+(B)	*	RxD+(B)
TxD-(A)		RxD-(A)
RxD+(B)	• • • • • • • • • • • • • • • • • • • •	TxD+(B)
RxD-(A)	—	TxD-(A)
GND	•	GND


Dimensions (Unit: mm)










Bottom View






I-7521(D)/I-7522(D)/I-7523(D)











Bottom View DIN-Rail Mounting Bracket

Side View

- Ordering Information

Art. No. 113817 Art. No. 113892 Art. No. 113828 Art. No. 113891 Auf Anfrage Auf Anfrage

I-7521 CR	Programmable Intelligent Communication Controller (RoHS)	I-7523 CR	Programmable Intelligent Communication Controller (RoHS)
I-7521D CR	CR I-7521 with Display		I-7523 with Display
I-7522 CR	Programmable Intelligent Communication Controller (RoHS)	I-7524 CR	Programmable Intelligent Communication Controller (RoHS)
I-7522D CR	I-7522 with Display	I-7524D CR	I-7524 with Display
I-7522A CR	Programmable Intelligent Communication Controller (RoHS)	I-7527 CR	Programmable Intelligent Communication Controller (RoHS)
I-7522AD CR	I-7522A with Display	I-7527D CR	I-7527 with Display

Art. No. 113816 Art. No. 113829 Art. No. 113897 Art. No. 113898 Art. No. 113899 Art. No. 113900

- Accessories

MDR-20-24	24 Vpc/1 A, 24 W Power Supply with DIN-Rail Mounting	GPSU06U-6	24 Vbc/0.25 A, 6 W Power Supply
DIN-KA52F	24 Vpc/1.04 A, 25 W Power Supply with DIN-Rail Mounting	KA-52F	24 Vpc/1.04 A, 25 W Power Supply