# Neu-X300





Neu-X300-Q370



Neu-X300-H310

## **Main Features**

- 8th gen. Intel<sup>®</sup> Core<sup>™</sup> socket type processor
- HDMI 2.0 resolution 4K@60Hz
- Storage M.2 M Key 2280
- Support Vpro technology

- Dual DDR4 SO-DIMM
- TPM2.0 IC on board
- Fanless design

## **Product Overview**

Powered by the 8th generation Intel<sup>®</sup> Core<sup>™</sup> processor, the Neu-X300 Series fanless embedded player can handle powerful multimedia content and offer stunning visuals for striking 4K entertaining content creation, media playback, and image processing. The Neu-X300 Series manages in-store traffic analytics, simultaneously engaging "calls to action" with virtual interactions in order to increase product interest.

Neu-X300 Series, supporting up to triple HDMI 2.0 displays, USB 3.0 ports, and a RS232 interface, is an ideal high-end embedded player to optimize information visualization, convey brand messages, customer engagement, and smart retail management efficiencies to increase in-store traffic and sales. The slim fanless design with extended durability further covers usages like endless aisles, QSRs, drive-thru kiosks, bus stops, digital transit information signs, and information stands.

# **Specifications**

#### **CPU Support**

- 8th Gen Intel<sup>®</sup> Core<sup>™</sup> socket type processor up to 35W
  - i3-8100T Quad cord, 3.10 GHz, TDP 35W
  - i5-8500T 6 cord, 2.10 GHz, TDP 35W
  - i7-8700T 6 cord, 2.40 GHz, TDP 35W

#### Chipset

- Intel<sup>®</sup> PCH Q370
- Intel<sup>®</sup> PCH H310

#### Graphics

• Intel<sup>®</sup> UHD Graphics 630

#### Main Memory

• 2 x 260pin SO-DIMM socket, support up to DDR4 2400/2666MHz, non ECC, un-buffered memory up to 32G (single 16G)

#### I/O Interface-Front

- 1 x Storage active LED
- 1 x Power LED
- 1 x Power button

## I/O Interface-Rear

- 2 x Antenna hole
- 4 x USB 3.0
- 3 x HDMI2.0 (only 2x HDMI2.0 for H310)
- 1 x RS232/422/485 COM port
- 2 x RJ45 with LEDs for Gigabit LAN
- 1 x 12V DC input, 4 pin DC Jack
- 1 x Audio out

#### Internal I/O

- 3 x RS232 COM port connector
- 4 x USB 2.0 pin header
- 1 x SATA connector

### Expansion


• 1 x M.2 2230 connector, support Wi-Fi module

#### Storage

- 1 x M.2 M Key 2280 SSD with SATA/PCIe signal
- 1 x Onboard TPM2.0 (no support for H310)

#### Spectra (Schweiz) AG info@spectra.ch



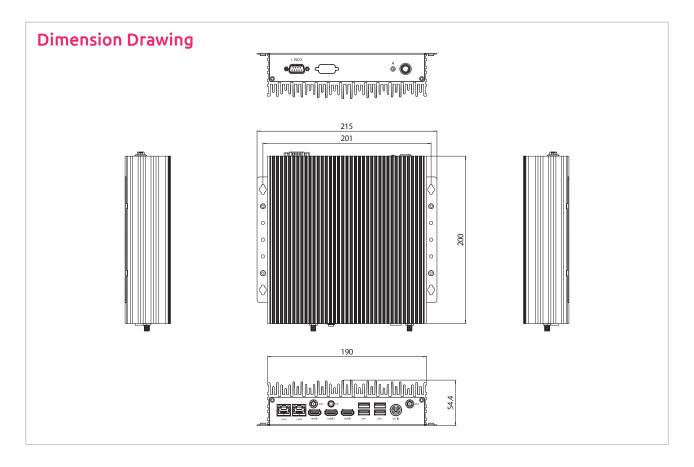

#### **Power Supply**

- 1 x External 96W AC/DC power adapter with lock
- Input: 100VAC to 240VAC
- Output: DC+12VDC

#### Environment

- Operating temperature: -5°C to 45°C
- Storage temperature: -20°C to 80°C
- Humidity: 95% (non-condensing)

#### Certification

- CE (EMC EN55032 +EN55024)
- FCC Class A (EMI part 15B)

#### Dimensions

• 190mm (L) x 200mm (W) x 54.4mm (H)

#### **Operating System**

• Win10 64bit/Linux

## **Ordering Information**

- Art.-Nr.: 161194 Neu-X300-Q370
  - 8th Generation Intel® Core $^{\rm TM}$  processor slim and fanless system with PCH Q370
- Art.-Nr.: 161195 `Neu-X300-H310

8th Generation Intel® Core™ processor slim and fanless system with PCH H310

Last update: 12/05/2019

Spectra (Schweiz) AG info@spectra.ch

